

i-290

Datasheet

MAXA
HEATING & COOLING

i-290 0115 Heat Pump R290 Gas

i-290

Key Features

- ▶ Inverter Monoblock.
- ▶ Single solution for heating, cooling and hot water production.
- ▶ Unique design integrates advanced technical solutions and modern aesthetics.
- ▶ The i-290 range is available in 9 sizes, with power between 6kW and 27kW.
- ▶ Maxa's i-290 heat pumps are designed to generate high water temperature even in the harshest conditions.
- ▶ Made in Italy.
- ▶ Market leading SCOP's.
- ▶ 3 year Manufacturer's warranty. For information about extended warranties contact Energy Lab.



MAXA
HEATING & COOLING

01271 442 935
maxaheatpumps.co.uk

Company Number: 15140488
Registered Office: 53 Stonecot Hill, Sutton,
Surrey, United Kingdom, SM3 9HJ

i-290

Datasheet

i-290 0115 Heat Pump

R290 Gas

Cooling		
Cooling capacity (1)	kW	13,5* / 12,4
Power input (1)	kW	3,7
E.E.R. (1)	W/W	3,4
Cooling capacity (2)	kW	14,4* / 12,90
Power input (2)	kW	2,40
E.E.R. (2)	W/W	5,37
SEER (5)	W/W	5,0
Water flow rate (1)	L/s	0,6
Useful head (1)	kPa	80
Heating		
Heating capacity (3)	kW	17,7* / 16,33
Power input (3)	kW	3,30
C.O.P. (3)	W/W	4,94
Heating capacity (4)	kW	17,69* / 15,2
Power input (4)	kW	4,5
C.O.P. (4)	W/W	3,4
Heating capacity (11)	kW	16,64* / 14,7
Power input (11)	kW	5,2
C.O.P. (11)	W/W	2,8
SCOP (6)	W/W	4,9
Water flow rate (3)	L/s	0,8
Useful head (3)	kPa	68
Energy efficiency (Water 35°C-65°C)		A++/A++


Compressor		
Type		Twin Rotary DC Inverter
Compressors	n°	1
Refrigerant circuits	n°	1
Refrigerant quantity (7)	kg	1,27
Hydraulic circuit		
Plumbing fittings	inch	G1"
Minimum water volume (8)	L	155
Noise level		
Sound power (9)	dB(A)	62
Sound pressure at 1m distance (10)	dB(A)	47
Electrical data		
Power supply		400V/3/50Hz
Maximum power input	kW	8
Maximum input current	A	16
Weight		
Shipping weight	kg	188

MCS Certification Number: ICIM-PDC-000210

SCOP-UK

Flow Temperature	SCOP
35°C	4.60
50°C	3.81
65°C	3.28

i-290 0115 - Dimensions

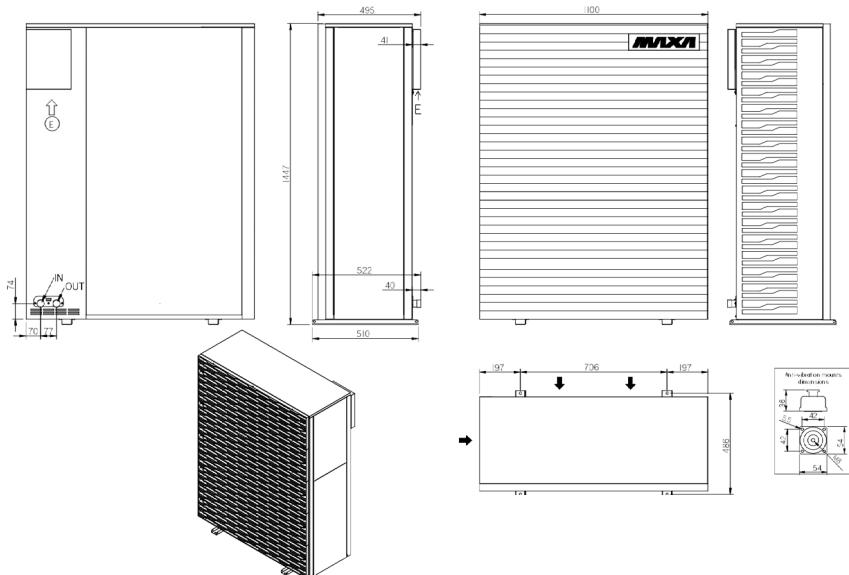

• PERFORMANCE REFERRING TO THE FOLLOWING CONDITIONS:

1. Cooling: outdoor air temperature 35°C; in/out water temperature 12/7°C.
2. Cooling: outdoor air temperature 35°C; in/out water temperature 23/18°C.
3. Heating: outdoor air temperature 7°C db 6°C db; in/out water temperature 30/35°C.
4. Heating: outdoor air temperature 7°C db 6°C db; in/out water temperature 47/55°C.
5. Cooling: low temperature, variable output, fixed flow rate.
6. Heating: average climatic conditions; $T_{biv} = -7°C$; low temperature, variable output, fixed flow rate.
7. Indicative data subject to changes. For the correct value, always refer to the technical label on the unit.
8. Calculated for a decrease in system water temperature of 10°C with a defrost cycle lasting 6 minutes.
9. Sound power: heating mode according to EN 12102:2022; value determined on the basis of measurements made in accordance with UNI EN ISO 9614-1, in compliance with Eurovent certification requirements.
10. Sound pressure: value calculated from the sound power level using the standard ISO 3744:2010 at a distance of 1m.
11. Heating: outdoor air temperature 7°C db 6°C db; in/out water temperature 55/65°C.